




INSTALLATION INSTRUCTIONS



CIVIC SI | INTEGRA 1.5L

PART NO. 19600

BILL OF MATERIALS:

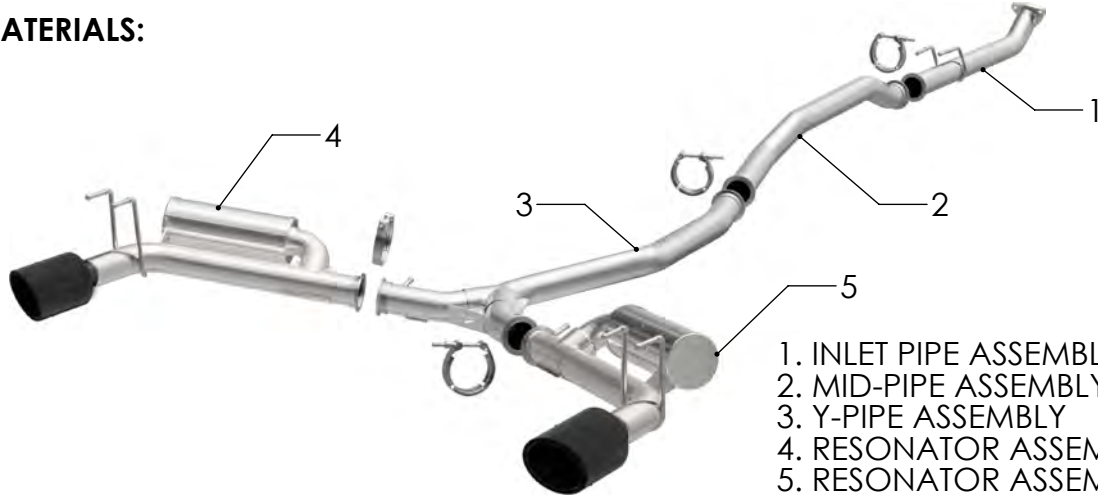

- 1. INLET PIPE ASSEMBLY
- 2. MID-PIPE ASSEMBLY
- 3. Y-PIPE ASSEMBLY
- 4. RESONATOR ASSEMBLY D/S
- 5. RESONATOR ASSEMBLY P/S

SHOP SUPPLIES:

HARDWARE KIT:

- 1. [4] 2.50" V-Clamp



WEAR SAFETY GLASSES



READ INSTRUCTIONS THOROUGHLY BEFORE INSTALLING PRODUCT



SPRAY LUBRICANT

To ease removal of existing exhaust components (especially on older vehicles) spray penetrating lubricant on all fasteners and hangers/insulators that will be loosened or removed and let soak before disassembly.

MINIMUM REQUIRED TOOLS:



13,15 mm



Hanger Tool (Or Pry Bar)

MAGNAFLOW RECOMMENDS PROFESSIONAL INSTALLATION ON ALL THEIR PRODUCTS



WARNING: When working on, under, or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust system temperatures may cause severe burns. If working without a lift always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure a safe work area. Serious injury or death could occur if safety measures are not followed.

ATTENTION: Always install any supplied band or U-bolt clamps to the proper torque specifications of 40-45 ft-lb for band clamps and 30-35 ft-lb for U-bolt clamps. Over tightening will result in the clamps breaking and will NOT be warranted by MagnaFlow.

MAGNAFLOW: 1901 Corporate Centre Dr - Oceanside, CA 92056 | 1(800)990-0905

Technical Support: 1(800) 959-9226 | Email: moreinfo@magnaflow.com

INSTALLATION INSTRUCTIONS



Step 1. Begin removal of your OEM exhaust system by unbolting the flange behind the catalytic converter. Remove all welded hangers from the rubber insulators. The exhaust can now be removed. Retain all fasteners and insulators as they will be needed to mount your new MagnaFlow exhaust system



Step 2. Install your new system by first mounting the Inlet Pipe Assembly to the outlet flange using the OE fasteners and then attaching the MidPipe to the Inlet pipe using a supplied 2.50\" data-bbox="514 548 918 625"/>



Step 3. Next, using the supplied 2.50\" data-bbox="517 848 913 895"/>

INSTALLATION INSTRUCTIONS



Step 4. Install the Muffler Assemblies in a similar fashion using the supplied 2.50" V-clamps and fitting the hangers into the insulators.



Step 5. Once a final position has been chosen for the new exhaust system, evenly tighten all clamps from front to rear using the torque specification on page one of these instructions. Inspect all fasteners after 25-50 miles of operation. Re-tighten if necessary.