


BRExhaust™

A **MAGNAFLOW** GROUP COMPANY

INSTALLATION INSTRUCTIONS | PART NO. 106-0515

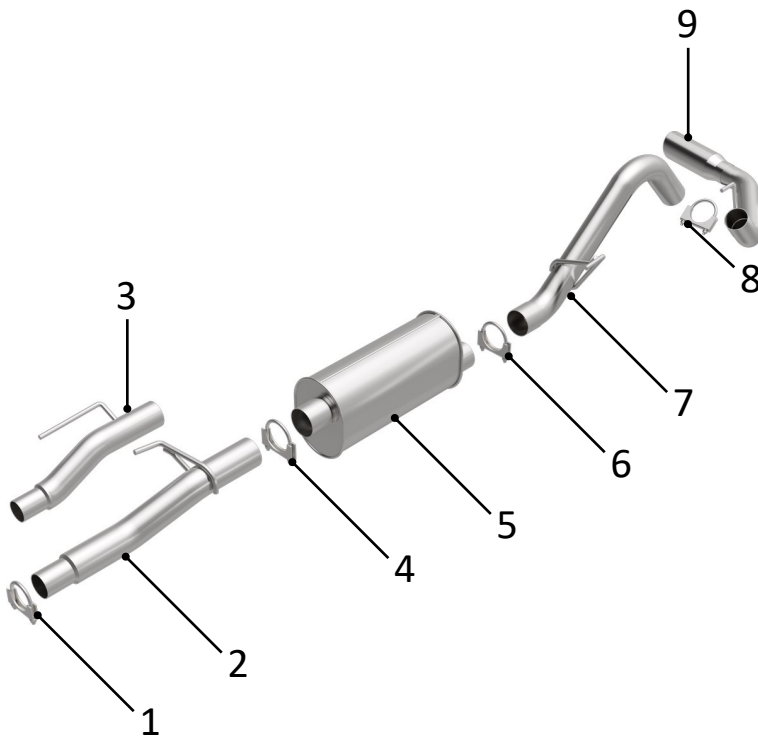

STEP 1:

(Carefully read all instructions before installation) Disconnect the vehicle's battery before removal of the OEM exhaust system. This will prevent electrical accidents and will reset the computer if it applies to the vehicle. Remove existing exhaust system from the vehicle. Only remove parts that will be replaced. Clean existing flange with a wire brush to ensure proper sealing.

STEP 2:

For early 2004 and older vehicles attach **[2] Inlet Pipe Assembly** to existing isolator and exhaust with supplied **[1] Clamp**.

For late 2004 and newer vehicles attach **[3] Inlet Pipe Assembly** to existing isolator and exhaust with supplied **[1] Clamp**.

STEP 3:

Attach **[5] Muffler Assembly** to your selected **[2] Inlet Pipe Assembly** or **[3] Inlet Pipe Assembly** with supplied **[4] Clamp**.

STEP 4:

Attach **[7] Over-Axle Pipe Assembly** to existing isolator and **[5] Muffler Assembly** with supplied **[6] Clamp**.

STEP 5:

Attach **[9] Tailpipe Assembly** to existing isolator and **[7] Over-Axle Pipe Assembly** with supplied **[8] Clamp**.

STEP 6:

Ensure new exhaust is not contacting any portion of the underbody of the vehicle or drivetrain.

STEP 7:

Tighten all clamps and bolts starting from rear of the vehicle. **(DO NOT EXCEED 30FT-LB WHEN TIGHTENING CLAMP AND CHECK ALL CLAMPS AFTER 50 MILES. RETIGHTEN IF NECESSARY)**

WARNING:

When working on, under, or around any vehicle exercise caution. Please allow the vehicle's exhaust system to cool before removal, as exhaust temperatures may cause severe burns. If working without a lift, always consult vehicle manual for correct lifting specifications. Always wear safety glasses and ensure a safe work area. Serious injury or death could occur if safety measures are not followed.



BRExhaust recommends professional installation for all products

Technical Support: 1-800-631-7271

BRExhaust — 1901 Corporate Ctr, Oceanside, CA 92056

www.brexhaust.com